


KONA Macro IoT Gateway

Scalable LoRaWAN® Gateway for Outdoor Deployments

The **KONA Macro IoT Gateway** is an ideal solution for operators and enterprises that require a very scalable low cost LoRaWAN® gateway that minimizes network TCO while improving coverage and capacity.

- **Smart Cities**
- **Smart Agriculture**
- **Asset Tracking**
- **Environmental Monitoring**
- **Smart Metering**
- **Waste Management**
- **Outdoor Industrial Facilities**
- **Multi-Building Campuses**

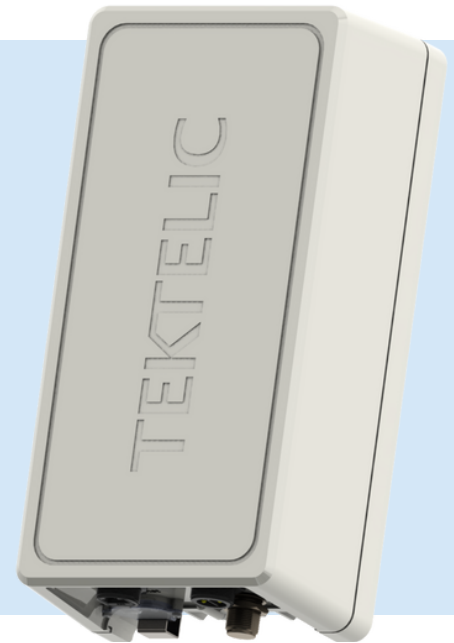

CE

Key Product Differentiators

- » Optimize coverage and capacity with a cost-effective and extremely compact LoRaWAN® gateway.
- » Quick and easy deployment made possible with custom mounting options, including utility pole, lamp post, tower, roof or wall mounts.
- » Reduce set-up costs with plug-and-play installation utilizing the custom provisioned factory image.
- » Lower site operational costs due to low power consumptions and passive cooling.
- » High availability carrier grade design with support for in-service configuration and software updates.
- » Excellent out of band rejection of Interference from other networks such as Cellular and Paging.
- » Fully integrated with the broad eco-system of LoRa™ network servers and sensors.

Key Features

- » US915, EU868, AU915, AS923 ISM Bands
- » Frequency Duplex 16 Rx / 2 Tx (NA)
- » Time Duplex 16 Rx / 2 Tx (Int.)
- » Integrated Cellular 3G/4G Modem
- » Integrated GPS and 3G/4G Antenna
- » IP67 Design
- » Hardened Carrier Grade Enclosure
- » 27 dBm Tx Power
- » Integrated Cavity Filter
- » Precise Network Synchronization (GPS)
- » Geolocation (optional)

KONA Macro IoT Gateway

Scalable LoRaWAN® Gateway for Outdoor Deployments

Technical and Functional System Specifications

Mechanical Parameters

MTBF	850,000 hours
DC Power Consumption	14 W (Typical)
Operational Temperature	-40°C to +60°C
Operational Humidity	10% to 100% Condensing
Ingress Protection	IP67
Size	144 x 282 x 92 mm
Weight	2.6 kg
Volume	3.7 L

LoRa Radio Parameters

ISM Bands (FDD)	US915
ISM Bands (TDD)	EU868, AU915, AS923
Tx Power	27 dBm
Rx Sensitivity	-142 dBm (SF12, 293 bits/sec)
Rx Noise Figure	3.5 dB
Rx Linearity	-10 dBm
Rx Dynamic Range	70 dB Analog, 100+ dB Digital

Software and Management


Tools	Access Control List management
	3G/4G Parameter Configuration
	System Health Monitor
	Radio Configuration and Control
	Remote Software Upgrade
	Active and Passive image management
	Factory image provisioning
	Field Configuration Tool
Networking	DHCPv4 client
	TFTP server
	HTTP server
	Firewall and Access Lists

Interfaces

Ethernet Backhaul	RJ-45 Internal antenna
GPS	Internal antenna N-Type
Cellular Backhaul (3G/4G)	37-57 VDC or PoE (802.3at)
LoRa Antenna	
Power	

Regulatory Compliance

Safety	UL / CSA / EN / IEC 62368-1
Regulatory	FCC: 15.247, 15.109, 15.209
	ISED: RSS - 247, RSS - Gen
	CE: RED 2014/53/EU

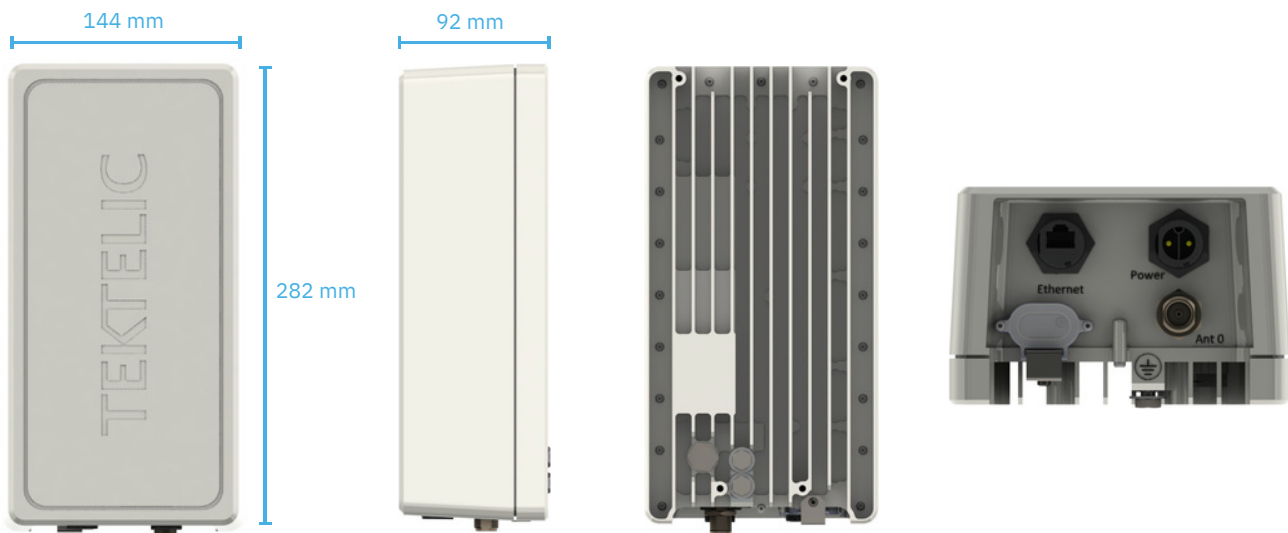

UC-Wireless is a leading MEA distributor of best-of-breed communication technology and systems. As part of our comprehensive solutions, we proudly distribute TEKTELIC Communications, a premier manufacturer of world-class LoRaWAN® IoT Gateways, Sensors, and custom applications. Partnering with TEKTELIC and our other OEMs allows us to deliver enterprise-grade, end-to-end IoT solutions that are easily, quickly, and cost-effectively deployed across industries to meet even the most demanding IoT challenges. Visit us at uc-wireless.com for more information.